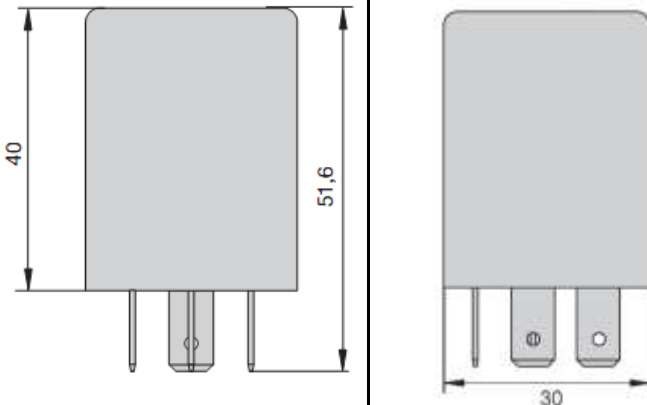

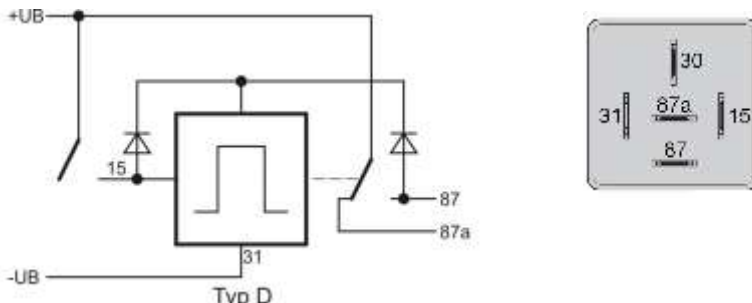
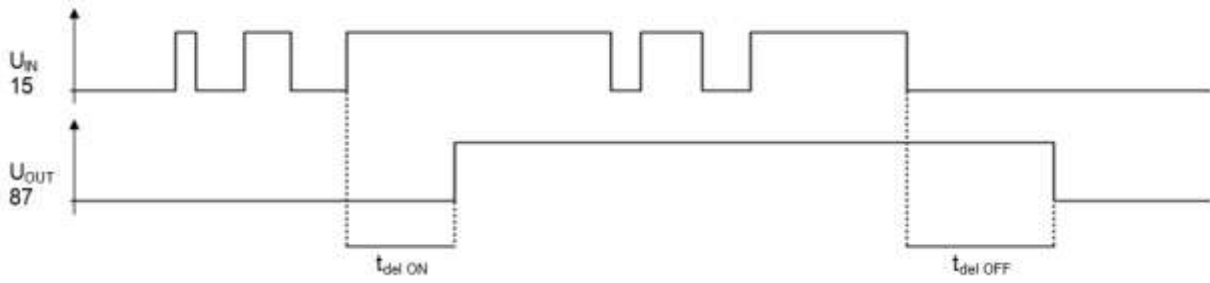


	Description		Part Number:	
	Double Timer Relay DC 12V Delay ON 2s / Delay OFF 15s TYPE D		DTR-100-042-00-20A	
Outline Dimensions				
		 2, 4, 5, 6 and 8 blade terminals 6.3 x 0.8 footprint to ISO 7588 Pin Configuration		
Wiring Diagram : Type D				
				
Function Diagram				
				
Characteristics				
Nominal Voltage	UN	DC 12V	Time Tolerance	± 5%
Operating Voltage	UOP	DC 12V ... 15V	Nominal Current	IN NO: 20A / NC: 10A
Operating Current	IOP	0mA / 100mA	Operational Temperature	-40°C...+85°C
Delay ON	t _{del ON}	2s	Life Time	100.000 switches
Delay OFF	t _{del OFF}	15s		
Materials				
Baseplate	PA66-GF30	Terminals	Cu Zn 37 F37	
Cap	PA66-GF30			
Additional Data				
In conformity with :	ISO 7588 - ISO 8092	EMC DIN 40839	EMC 95/54 EG	
PRO 04.80	REV 00 18/10/2019	Produced by : M.TOUZE Date : 18/10/2019	Verified by : Date :	